


product description

Glass fiber-optic cable, sold by the meter, unassembled

FO Standard Cable GP (50/125), standard cable splittable, UL approval, max. length 1000 m minimum order quantity 20 m sold by the meter

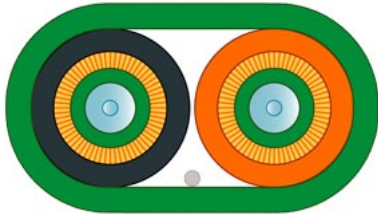

suitability for use	Cable for installation indoors and outdoors, UL approval
cable designation	AT-W(ZN)YY 2x1 G 50/125 OM2++
optical data	
attenuation factor per length	
• at 850 nm / maximum	2.7 dB/km
• at 1300 nm / maximum	0.7 dB/km
bandwidth length product	
• at 850 nm	600 GHz·m
• at 1300 nm	1200 GHz·m
mechanical data	
number of fibers / per FOC core	1
number of FO cores / per FOC cable	2
version of the FO conductor fiber	Multi-mode gradient fiber 50/125 µm, OM 2
design of the FOC core	Hollow core, filled, diameter 1400 µm
design of the fiber-optic cable	segmentable
outer diameter	
• of the optical fibers	50 µm
• of the optical fiber sheath	125 µm
• of the FOC core sheath	2.9 mm
symmetrical deviation / of the outer diameter of the FOC core sheath	0.1 mm
width / of cable sheath	7.4 mm
thickness / of cable sheath	4.5 mm
material	
• of the fiber-optic cable core	Quartz glass
• of the optical fiber sheath	Quartz glass
• of the FOC core sheath	PVC
• of the fiber-optic cable sheath	PVC
• of the strain relief	Aramid fibers
color	
• of the FOC core sheath	orange/black
• of cable sheath	green
bending radius	
• with single bend / minimum permissible	45 mm
• with multiple bends / minimum permissible	65 mm
tensile load	
• during installation / short-term	1200 N
• during operation / maximum	500 N
short-term shear force per length	600 N/cm

continuous shear force per length	400 N/cm
weight per length	40 kg/km
ambient conditions	
ambient temperature	
• during operation	-25 ... +80 °C
• during storage	-25 ... +80 °C
• during transport	-25 ... +80 °C
• during installation	-5 ... +50 °C
fire behavior	flame-resistant acc. to IEC 60332-1-2 and IEC 60332-3-22 (Cat. A)
class of burning behaviour / according to EN 13501-6	Eca
chemical resistance	
• to mineral oil	acc. to IEC 60811-404 with test oil IRM 902 (acc. to ISO 1817), +70 °C, 4 h
• to grease	conditional resistance
• to water	conditional resistance
radiological resistance / to UV radiation	resistant
product features, product functions, product components / general	
product feature	
• halogen-free	No
• silicon-free	Yes
product component / rodent protection	No
wire length	
• for glass FOC / for 100BaseFX / for Industrial Ethernet / maximum	5000 m
• for glass FOC / for 1000BaseSX / for Industrial Ethernet / maximum	750 m
• for glass FOC / for 1000BaseLX / for Industrial Ethernet / maximum	2000 m
• for glass FOC / for 1000BaseLSX / for Industrial Ethernet / maximum	2000 m
• for glass FOC / for 10GBaseLX4 / for Industrial Ethernet / maximum	300 m
• for glass FOC / with PROFIBUS / maximum	3000 m
standards, specifications, approvals	
certificate of suitability	
• UL approval	Yes; UL approval: cULus OFN (NEC Article 770, UL 1651) / CSA approval: OFN 90 FT4 (CSA Standard C22.2 No. 232)
• RoHS conformity	Yes
reference code	
• according to IEC 81346-2	WH
• according to IEC 81346-2:2019	WHA
further information / internet-Links	
Internet-Link	
• to web page: selection aid TIA Selection Tool	http://www.siemens.com/tia-selection-tool
• to website: Industrial communication	http://www.siemens.com/simatic-net
• to website: Industry Mall	https://mall.industry.siemens.com
• to website: Information and Download Center	http://www.siemens.com/industry/infocenter
• to website: Selection guide for cables and connectors	https://sie.ag/2QdlxcP
• to website: Image database	http://automation.siemens.com/bilddb
• to website: CAX-Download-Manager	http://www.siemens.com/cax
• to website: Industry Online Support	https://support.industry.siemens.com

last modified:

3/18/2023 