Goodrive20-09 Series VFD for Hoisting





/ Product Profile

High power density, small volume design

Goodrive20-09 Series VFD for Hoisting

Goodrive20-09 is a special lifting inverter developed by the INVT for load characteristics and control requirements of electric hoist, European type crane, small tonnage portal crane or bridge crane. It integrates the logic of hoisting brake and the control logic of conical motor, and has the special functions of torque verification, brake feedback, zero detection, travel limit, overload protection, light load lifting speed, motor over-temperature protection, and so on.







control logic







Excellent performance

Lifting application macro

Comply with hoisting industry standards

/ Product Features

Compact structure

60% reduction in installation area 68% reduction in volume Previous generation product

Special function of hoisting

Safe and reliable, high work efficiency



- Standard built-in DC reactor for 18.5kW and higher VFD models
- · All series VFDs have built-in brake units

Special terminal design

More reliable, multiple choice



8 digital input

- Support external power supply: (-20%)24~48VDC(+10%)、 (-10%)24~48VAC(+10%) input
- Support NPN and PNP terminal input
- S7 and S8 terminals support PTC input protection function

3 relay output

RO2 relay with gold plated contact, capacity: 7A/AC250V, 1A/DC30V

Safety protection

Fault protection function

Supply more than 30 kinds of protection function, such as overcurrent, overvoltage, overheat, phase lose, underload.

Low voltage protection

When the bus voltage is reduced or power is cut off, the converter will stop quickly to ensure no hook, and automatically reset when the bus voltage is restored.

Low speed running protection

Low speed operation protection function can avoid damage of motor due to long time low speed operation. When the frequency of converter operation is lower than or equal to the set protection frequency and time out, the fault of low speed operation protection will be reported.

Excellent performance

Conical motor control


Integrated conical motor control algorithm increase the magnetic flux to release the brake when starting, and reduce the magnetic flux to close the brake when stopping.

Braking capacity

100% for long time, 120% for 1 minute, and 170% for 10 seconds

Hoisting application macro

Simple commissioning



Number 1, 2, 3, 5 are the parameter setting values of different application macro in function

Type Selection

Model instruction

GD20-09-2R2G-4-B

(1)

(3) (4)


| Field | Identifier | Description | Example | | |
|------------------|------------|-----------------------------|--|--|--|
| Product category | 1 | Product series abbreviation | GD20-09 series VFD for hoisting | | |
| Rated power | 2 | Power range + load type | 2R2: 2.2kW G: Constant torque load | | |
| Voltage class | 3 | Voltage class | 4: 380V(-15%)~440V(+10%) | | |
| Lot No. | 4 | Brake unit | B: Built-in brake unit Default/None: No built-in brake unit | | |

Power Ratings

| Model | Voltage class | Output power (kW) | Input current (A) | Output current (A) |
|------------------|---------------|----------------------|----------------------|-----------------------|
| GD20-09-0R7G-4-B | | 0.75 | 3.4 | 2.5 |
| GD20-09-1R5G-4-B | | 1.5 | 5.0 | 4.2 |
| GD20-09-2R2G-4-B | | 2.2 | 5.8 | 5.5 |
| GD20-09-004G-4-B | 3PH 380V | 4 | 13.5 | 9.5 |
| GD20-09-5R5G-4-B | | 5.5 | 19.5 | 14 |
| GD20-09-7R5G-4-B | | 7.5 | 25 | 18.5 |
| GD20-09-011G-4-B | | 11 | 32 | 25 |
| GD20-09-015G-4-B | | 15 | 40 | 32 |
| GD20-09-018G-4-B | | 18.5 | 47 | 38 |
| GD20-09-022G-4-B | | 22 | 51 | 45 |
| GD20-09-030G-4-B | | 30 | 70 | 60 |
| GD20-09-037G-4-B | | 37 | 80 | 75 |

/ Installation Dimension


Wall mounting Installation dimension

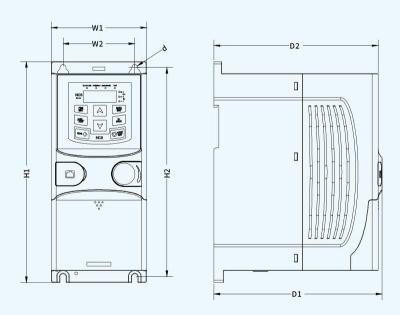


Wall mounting diagram of 0.75~4kW VFDs

| Model | W1 | W2 | H1 | H2 | D1 | D2 | Hole diameterd |
|------------------|----|----|-----|-----|-------|-------|----------------|
| GD20-09-0R7G-4-B | 80 | 60 | 185 | 175 | 140.5 | 137.3 | 5 |
| GD20-09-1R5G-4-B | 80 | 60 | 185 | 175 | 140.5 | 137.3 | 5 |
| GD20-09-2R2G-4-B | 80 | 60 | 185 | 175 | 140.5 | 137.3 | 5 |
| GD20-09-004G-4-B | 80 | 60 | 185 | 175 | 140.5 | 137.3 | 5 |

unit:mm

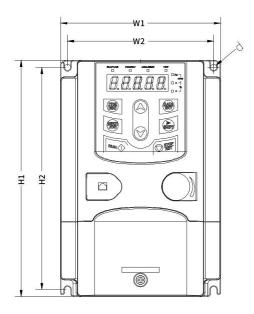


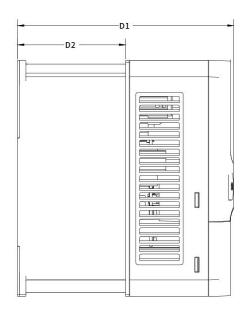


Wall mounting diagram of 5.5kW

| Model | W1 | W2 | H1 | H2 | D1 | D2 | Hole diameterd |
|------------------|-----|-----|-----|-----|-----|------|----------------|
| GD20-09-5R5G-4-B | 126 | 115 | 186 | 175 | 170 | 84.8 | 5 |

unit:mm

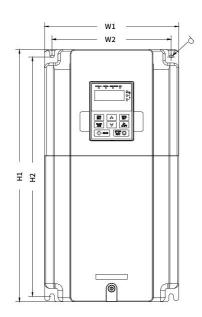

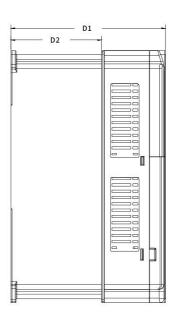


Wall mounting diagram of 7.5~37kW

| Model | W1 | W2 | H1 | H2 | D1 | D2 | Hole diameterd |
|------------------|-------|-------|-------|-------|-------|-------|----------------|
| GD20-09-7R5G-4-B | 146.0 | 131.0 | 256.0 | 243.5 | 167.0 | 86 | 6 |
| GD20-09-011G-4-B | 170.0 | 151.0 | 320.0 | 303.5 | 196.3 | 115 | 6 |
| GD20-09-015G-4-B | 170.0 | 151.0 | 320.0 | 303.5 | 196.3 | 115 | 6 |
| GD20-09-018G-4-B | 200.0 | 185.0 | 340.6 | 328.6 | 184.6 | 104.5 | 6 |
| GD20-09-022G-4-B | 200.0 | 185.0 | 340.6 | 328.6 | 184.6 | 104.5 | 6 |
| GD20-09-030G-4-B | 250.0 | 230.0 | 400.0 | 380.0 | 202.0 | 123.5 | 6 |
| GD20-09-037G-4-B | 250.0 | 230.0 | 400.0 | 380.0 | 202.0 | 123.5 | 6 |

unit:mm

Your trusted industry automation solution provider

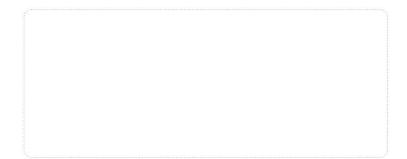





Service line: 86-755-23535967 E-mail:overseas@invt.com.cn

Website:www.invt.com

SHENZHEN INVT ELECTRIC CO.,LTD.

INVT Guangming Technology Building, Songbai Road, Matian, Guangming District, Shenzhen, China

• Traction Drive

- Frequency AC Drive
- Servo & Motion Control
- Motor & Electric Spindle
- PLC

Industrial Automation:

• Intelligent Elevator Contral System

Electric Power:

- HMI • SVG
- Solar Pump Controller
- UPS
- Online Energy Management System

New Energy Vehicle Electric Control System