


### product type designation

product description

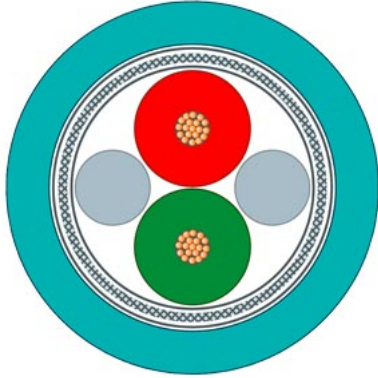

### PROFIBUS Festoon Cable GP

Flexible bus cable (2-core), sold by the meter, unassembled

PROFIBUS FESTOON Cable GP for festoon suspension, 2-core shielded max. acceleration: 4 m/QS min. 5 million bending cycles, sold by the meter, Delivery unit: max. 1000 m, minimum order quantity: 20 m .

suitability for use

Specially for festoon attachment

cable designation

02YS (ST) CY 1 x 2 x 0,65/2,56 LI petrol FR

### electrical data

attenuation factor per length

- at 9.6 kHz / maximum
- at 38.4 kHz / maximum
- at 4 MHz / maximum
- at 16 MHz / maximum

0.003 dB/m  
0.004 dB/m  
0.025 dB/m  
0.049 dB/m

impedance

- rated value
- at 9.6 kHz
- at 38.4 kHz
- at 3 MHz ... 20 MHz

150 Ω  
270 Ω  
185 Ω  
150 Ω

relative symmetrical tolerance

- of the characteristic impedance at 9.6 kHz
- of the characteristic impedance at 38.4 kHz
- of the characteristic impedance at 3 MHz ... 20 MHz

10 %  
10 %  
10 %

loop resistance per length / maximum

133 mΩ/m

shield resistance per length / maximum

19 Ω/km

insulation resistance coefficient

16000 GΩ·m

capacity per length / at 1 kHz

28 pF/m

operating voltage

- RMS value

80 V

### mechanical data

number of electrical cores

2

design of the shield

Overlapped aluminum-clad foil, sheathed in a braided screen of tin-plated copper wires

type of electrical connection / FastConnect

No

outer diameter

- of inner conductor
- of the wire insulation
- of the inner sheath of the cable
- of cable sheath

0.67 mm  
2.56 mm  
5.8 mm  
8 mm

symmetrical tolerance of the outer diameter / of cable sheath

0.3 mm

material

- of the wire insulation
- of cable sheath

polyethylene (PE)  
PVC

color	
<ul style="list-style-type: none"> <li>• of the insulation of data wires</li> <li>• of cable sheath</li> </ul>	red/green petrol
bending radius	
<ul style="list-style-type: none"> <li>• with single bend / minimum permissible</li> <li>• with continuous bending</li> </ul>	30 mm 70 mm
tensile load / maximum	80 N
weight per length	64 kg/km
<b>ambient conditions</b>	
ambient temperature	
<ul style="list-style-type: none"> <li>• during operation</li> <li>• during storage</li> <li>• during transport</li> <li>• during installation</li> <li>• note</li> </ul>	-40 ... +80 °C -40 ... +80 °C -40 ... +80 °C -40 ... +80 °C Electrical properties measured at 20 °C, tests according to DIN 47250 part 4 respectively DIN VDE 0472
fire behavior	flame resistant according to IEC 60332-3-24 (Category C)
class of burning behaviour / according to EN 13501-6	Eca
chemical resistance	
<ul style="list-style-type: none"> <li>• to mineral oil</li> <li>• to grease</li> <li>• to water</li> </ul>	conditional resistance Conditional resistance conditional resistance
radiological resistance / to UV radiation	resistant
<b>product features, product functions, product components / general</b>	
product feature	
<ul style="list-style-type: none"> <li>• halogen-free</li> <li>• silicon-free</li> </ul>	No Yes
<b>standards, specifications, approvals</b>	
UL/ETL listing / 300 V Rating	Yes; CMG / PLCT / Sun Res / Oil Res
UL/ETL style / 600 V Rating	Yes
certificate of suitability	
<ul style="list-style-type: none"> <li>• EAC approval</li> <li>• CE marking</li> </ul>	Yes Yes
Marine classification association	
<ul style="list-style-type: none"> <li>• American Bureau of Shipping Europe Ltd. (ABS)</li> <li>• French marine classification society (BV)</li> <li>• Det Norske Veritas (DNV)</li> <li>• Germanische Lloyd (GL)</li> <li>• Lloyds Register of Shipping (LRS)</li> <li>• Nippon Kaiji Kyokai (NK)</li> <li>• Polski Rejestr Statkow (PRS)</li> </ul>	No No No No No No No
reference code	
<ul style="list-style-type: none"> <li>• according to IEC 81346-2</li> <li>• according to IEC 81346-2:2019</li> </ul>	WG WGB
<b>further information / internet-Links</b>	
Internet-Link	
<ul style="list-style-type: none"> <li>• to web page: selection aid TIA Selection Tool</li> <li>• to website: Industrial communication</li> <li>• to website: Industry Mall</li> <li>• to website: Information and Download Center</li> <li>• to website: Selection guide for cables and connectors</li> <li>• to website: Image database</li> <li>• to website: CAx-Download-Manager</li> <li>• to website: Industry Online Support</li> </ul>	<a href="http://www.siemens.com/tia-selection-tool">http://www.siemens.com/tia-selection-tool</a> <a href="http://www.siemens.com/simatic-net">http://www.siemens.com/simatic-net</a> <a href="https://mall.industry.siemens.com">https://mall.industry.siemens.com</a> <a href="http://www.siemens.com/industry/infocenter">http://www.siemens.com/industry/infocenter</a> <a href="https://sie.ag/2QdlxcP">https://sie.ag/2QdlxcP</a>  <a href="http://automation.siemens.com/bilddb">http://automation.siemens.com/bilddb</a> <a href="http://www.siemens.com/cax">http://www.siemens.com/cax</a> <a href="https://support.industry.siemens.com">https://support.industry.siemens.com</a>
<b>last modified:</b>	10/30/2021 